


### 221 SERIES LEVER-NUTS®

The Way to Connect!

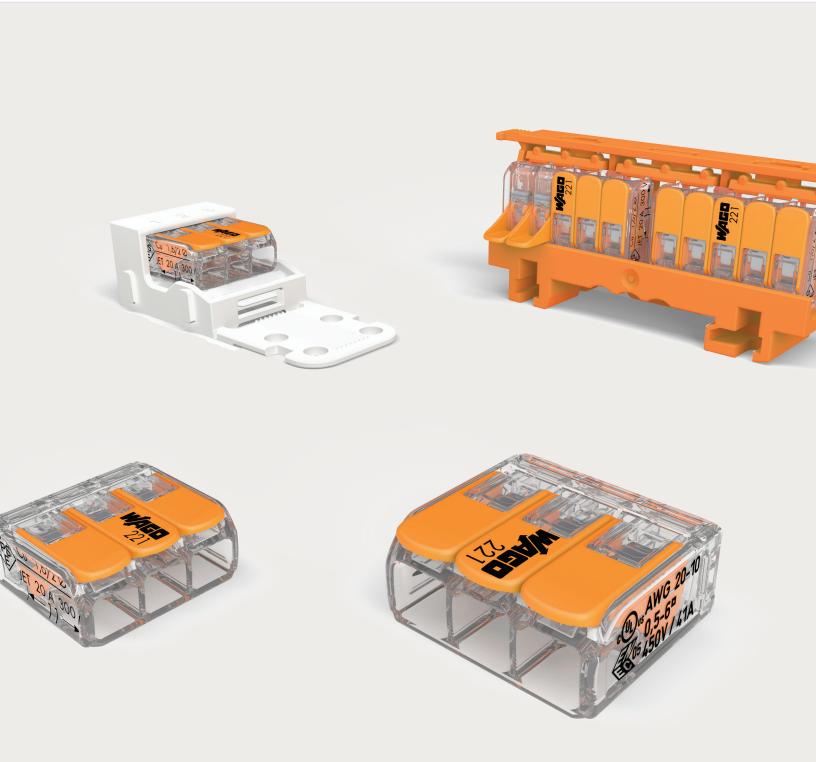

# 221 SERIES LEVER-NUTS®

## **COMPACT Splicing Connectors for All Wire Types**

12 AWG variant 24 ... 12 AWG



221-413 24 - 12 AWG

- Lift lever, insert stripped wire, push lever down done!
- Repeat as necessary completely reusable
- Operating temperature: max. 105 °C











	Universal mounting carriers for groups of connectors Snap-mount to DIN rail or mount to panel with screws			
		Description	Item No.	Pack. Unit
		Mounting carrier; for 2-, 3- and 5-wire connectors; 12 AWG variant	221-500	1
NEW	101 11 101	Mounting carrier; for 2-, 3- and 5-wire connectors; 10 AWG variant	221-510	1
		Strain relief plate; for use with 221-500 or 221-510 Mounting Carrier	222-505	1
		Angled DIN-rail adapter; for horizontal mounting of 221-500 or 221-510 carrier on DIN-35 rail	222-510	1



#### Two test slots

One at wire entry; one on opposite side



#### Industry's widest range of conductor sizes

Combine any type and size of copper conductors



Mounting carrier; for 2-wire connectors:

12 AWG variant

Mounting carrier; for 3-wire connectors;

12 AWG variant

Mounting carrier; for 5-wire connectors;

12 AWG variant

#### Transparent housing

221-502

221-503

221-505

Clearly identify if the conductor has been stripped and inserted properly

Description Item No. 2-wire connectors 221-412 100 3-wire connectors 221-413 50 5-wire connectors 25 221-415 10 AWG variant 600 V (1000 V signs & luminaires) 20 ... 10 AWG 30 A **Description** Item No. 2-wire connectors 221-612 50 3-wire connectors 221-613 30 221-615 5-wire connectors 15 Mounting carriers for single connectors For horizontal or vertical mounting to panel with screws **Description** 

600 V (1000 V signs & luminaires)

www.wago.us/221