

SOFT-CLOSE HINGE HG-JV65 For Vertical Use

 **INSTRUCTION**
Passed 50,000 open/
close private cycle test

HG-JV65-S-BL



HG-JV65-S-LGR



Comes with screw covers

- Closing speed of doors is adjustable with a hex key.
- Comes with self-close function which can hold doors closed.

[Specification]

- Temperature: 0°C~40°C

[Remarks]

- Please use with stoppers to prevent doors from opening over 180°.

[Parts Included]

- Screw cover

[Recommended Screw]

- For wood:

- Binding head tapping screw M5
- Pan head tapping screw M5

- For sheet metal:


- Binding head screw M5
- Pan head screw M5
- Button bolt M5

Video Link




[Operating Range]


- Free
- Soft and self closing





[Closing Speed Adjustment]



[Installation]



Closing speed of doors is adjustable with a hex key
(size: 2.5).

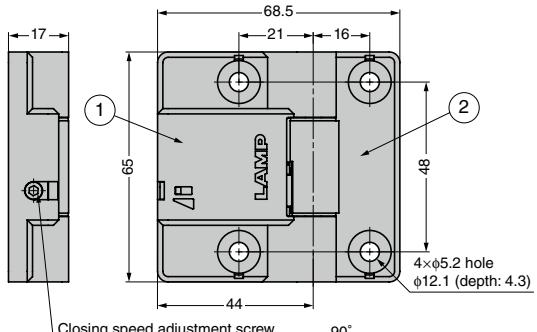

No.	Part Name	Material	Finish/Colour
①	Body A	Polyamide (PA)	Black, Light Grey
②	Body B	Steel	Nickel
③	Shaft	Brass	Nickel
-	Screw Cover	Elastomer (SPE)	Black, Light Grey

Ref#	CAD	Item Code	Item Name	Finish	Available Door Specs				Weight (g)	Box (pcs)	Carton (pcs)
					Width	Height	Weight (kg/2pcs)	Weight (kg/3pcs)			
GT	3D	170-046-272	HG-JV65-S-BL	Black	Max. 700	Max. 2400	1.0~7.0	7.0~12.0	85	1	60
GT	3D	170-046-273	HG-JV65-S-LGR	Light Grey						1	60